



REGULAR CUTTING MACHINE



Lay Out

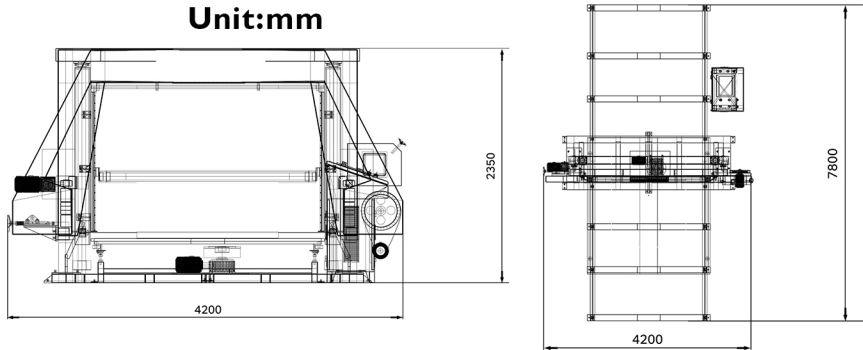

Maximum Cutting Density : 150D



Product Characteristic

- Standard pressure roller, cutting is more accurate, and the cotton is fast and not easy to deviate (Optional)
标配压辊，切割更精准，海绵块不容易偏离
- Suction device, the sponge is fixed more firmly and the cutting effect is better(Optional)
可选装吸风装置，海绵固定更牢固，切割效果更好
- High quality PLC and touch screen, speed more faster (Optional)
可选装PLC和触摸屏，速度更快
- It is used for horizontal reciprocating slicing of sponge blocks with a length of less than three meters, with a cutting thickness of 2-200mm, fully automatic digital control, accurate cutting and easy operation.
用于长度小于3米海绵块水平往复切片工作，切割厚度2-200mm，全自动数字控制，切割精准，操作简便。



PQ-2150

SPONGE HORIZONTAL CUTTING MACHINE 海绵平切机

GENMAX

Technical Parameters

Foam block size 海绵切割尺寸	W2150 xL3000 mm
Cutting height 切割高度	1200 mm
Cutting thickness 切割厚度	2-200 mm
Blade length 刀带长度	9480mm
Cutting speed 切割速度	0-30 (m/min)
Motor power 电机功率	8.32kw
Machine external size 机器外观尺寸	L7800 xW4200 xH2350mm

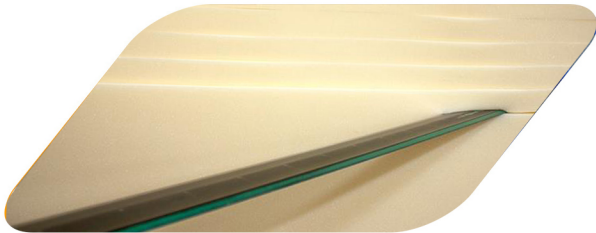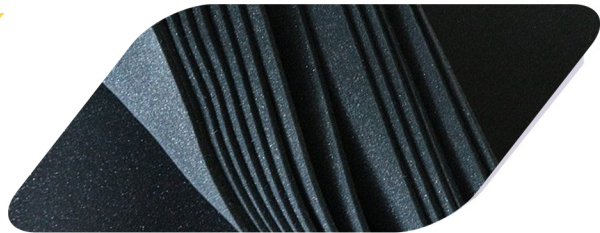

FOAMING

REGULAR CUTTING

CNC CUTTING

SHREDDER

PILLOW FEEDING